

# simalube – the automatic lubrication system for large guide rails



The lubrication system, consisting of simalube and a special brush, automatically maintains and lubricates large guide rails and prevents dry friction. It protects the guide rail with an even film of oil and cleans it at the same time. The running time can be freely selected between 1–12 months and directly set on the simalube lubricator.

#### Your benefits:

- Automatic, reliable and continuous lubrication of the guide rails (no manual lubrication required)
- Simultaneous cleaning of the guide rails (removal of dirt thanks to the spring-loaded brush)
- Reduction of service and maintenance costs
- Optimal distribution of the oil on the guide rail thanks to the special brush and the continuous and even oil discharge through the simalube

**simalube**

SWISS MADE






### Special brush for guide rails

The special brush enables lubricant to be applied evenly. The lubricant is conveyed from the simalube lubricant dispenser to the brush and thus transferred to the guide. The brush touches the guide on three sides, is spring-loaded and automatically adapts to the rail. The simalube is driven by a gas producing dry cell. The amount of lubricant can be continuously adjusted directly on the dispenser with a running time of 1-12 months.

### Your benefit with the simalube lubrication system

- Cost savings due to the elimination of manual lubrication
- Less wear on the guide rails thanks to continuous lubrication
- No production interruptions for maintenance and monitoring purposes, resulting in a higher availability of the plants
- Quiet operation of the plants
- Quick and clean replacement of the simalube dispenser without any loss of oil
- No contamination of adjacent components by oil splashes

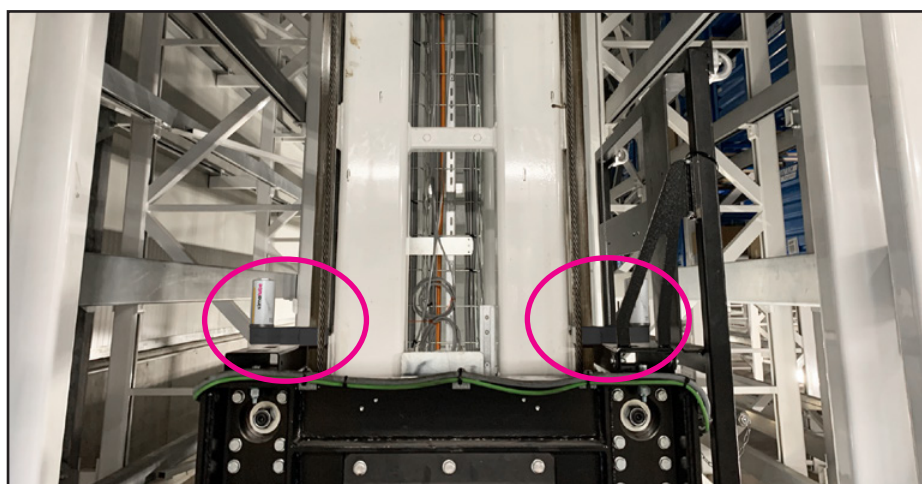

Click on the picture for more information:



### Technical data

Rail width	40 to 50 mm (1,57 to 1.96 in)
Rail depth	50 mm (1,96 in)
Ambient temperature	0 to +55 °C (32 to 131 °F). If a suitable lubricant is used, temperatures down to -20 °C (-4 °F) are also possible.
Speed	up to max 2,5 m/s (8,2 ft/s)
Lubricant	Mind the recommendations of the system manufacturer. However, only liquid lubricants (no greases) may be used.
Fastening thread for lubricator	G 1/4" inner thread
Installation weight	350 g (0.77 lb)
Installation	The brush body has a hole so that it can be fastened with an M8 screw.
Lubricator volume	15-250 ml

Download the simatec app now:

